

Stainless Steel Hose Reel Series 886




This hose reel, made entirely of stainless steel, is designed specifically for the food processing industry. It is very easy to clean thanks to rounded edges and features an easy to dismantle hose outlet, an externally mounted swivel, and a minimum number of material joints.

- Unique design makes easy cleaning
- Up to 25 m (82 ft.) hose capacity
- Meets international hygienic requirements



Dimensions

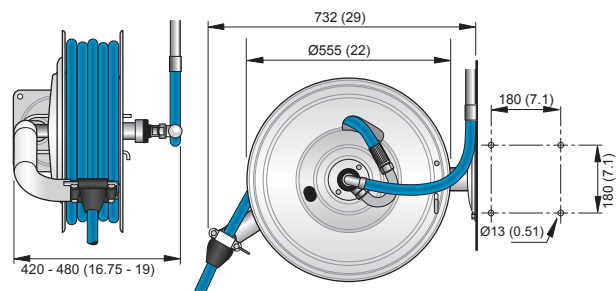

Technical data

Reel without hoses

Use for	Max. working pressure, MPa (psi)	For hose dimensions Int. Ø, mm (in)	For hose dimensions Length, m	Weight excl. hose, kg	Reel without hose Part no.
Water	2.0 (290)	19 (3/4)	18	28	30800186
Water	2.0 (290)	25 (1)	10	28	30802186
Water	10 (1450)	12.5 (1/2)	25	28	30800386
HP water	25 (3625)	10 (3/8)	25	28	30801386

Hoses with galvanized fittings

Use for	Max. working pressure, MPa (psi)	Hose type *)	Int. Ø, mm (in)	Distribution hose Length, m	Distribution hose Part no.	Connection hose Length, m	Connection hose Part no.
Water – food grade hose	2.0 (290)	E	12.5 (1/2)	25	30371898	1	30373670
Water – food grade hose	2.0 (290)	E	19 (3/4)	18	30371897	1	30373674
Water – food grade hose	2.0 (290)	E	25 (1)	10	30373663	1	30373664
HP water	25 (3625)	G	10 (3/8)	25	30371900	1	30344852

Hoses with stainless steel fittings

Use for	Max. working pressure, MPa (psi)	Hose type *)	Int. Ø, mm (in)	Distribution hose Length, m	Distribution hose Part no.	Connection hose Length, m	Connection hose Part no.
Water – food grade hose	2.0 (290)	F	12.5 (1/2)	25	30371951	1	30373671
Water – food grade hose	2.0 (290)	F	19 (3/4)	18	30371950	1	30373675
Water – food grade hose	2.0 (290)	F	25 (1)	10	30373665	1	30373666
HP water	25 (3625)	H	10 (3/8)	25	30371953	1	30373669

*) See table below

Material recycling: 100 %

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, Distribution hose	Hose fittings in free hose end, Inlet hose	Hose connection on reel, Distribution hose	Hose connection on reel, Inlet hose
E	Cover in NBR / PVC and inner tube in food grade quality NBR. Synthetic textile braid	-20 – +100 (steam up to +165)	Male BSP 60° cone, chrome plated	Female BSP 60° cone, chrome plated	Male BSP 60° cone	Male BSP 60° cone
F	Cover in NBR / PVC and inner tube in food grade quality NBR. Synthetic textile braid	-20 – +100 (steam up to +165)	Male BSP 60° cone, stainless steel	Female BSP 60° cone, stainless steel	Male BSP 60° cone	Male BSP 60° cone
G	Cover and inner tube in synthetic rubber. Single steel braid	-40 – +155	Female BSP 60° cone, chrome plated. With rubber hose grip	Female BSP 60° cone, chrome plated	Male BSP 60° cone	Male BSP 60° cone
H	Cover and inner tube in synthetic rubber. Single steel braid	-40 – +155	Female BSP 60° cone, stainless steel. With rubber hose grip	Female BSP 60° cone, stainless steel	Male BSP 60° cone	Male BSP 60° cone